




Environmental Product Declaration

as per ISO 14025 and EN 15804+A2

Owner of the declaration:	Tensar International Limited
Publisher:	Kiwa-Ecobility Experts
Programme operator:	Kiwa-Ecobility Experts
Registration number:	EPD-TENSAR-161-EN (Rev.1_20.05.2022)
Issue date:	14.12.2021
Valid to:	14.12.2026

Tensar® RE510 geogrid

High performance geogrid used for soil reinforcement solutions

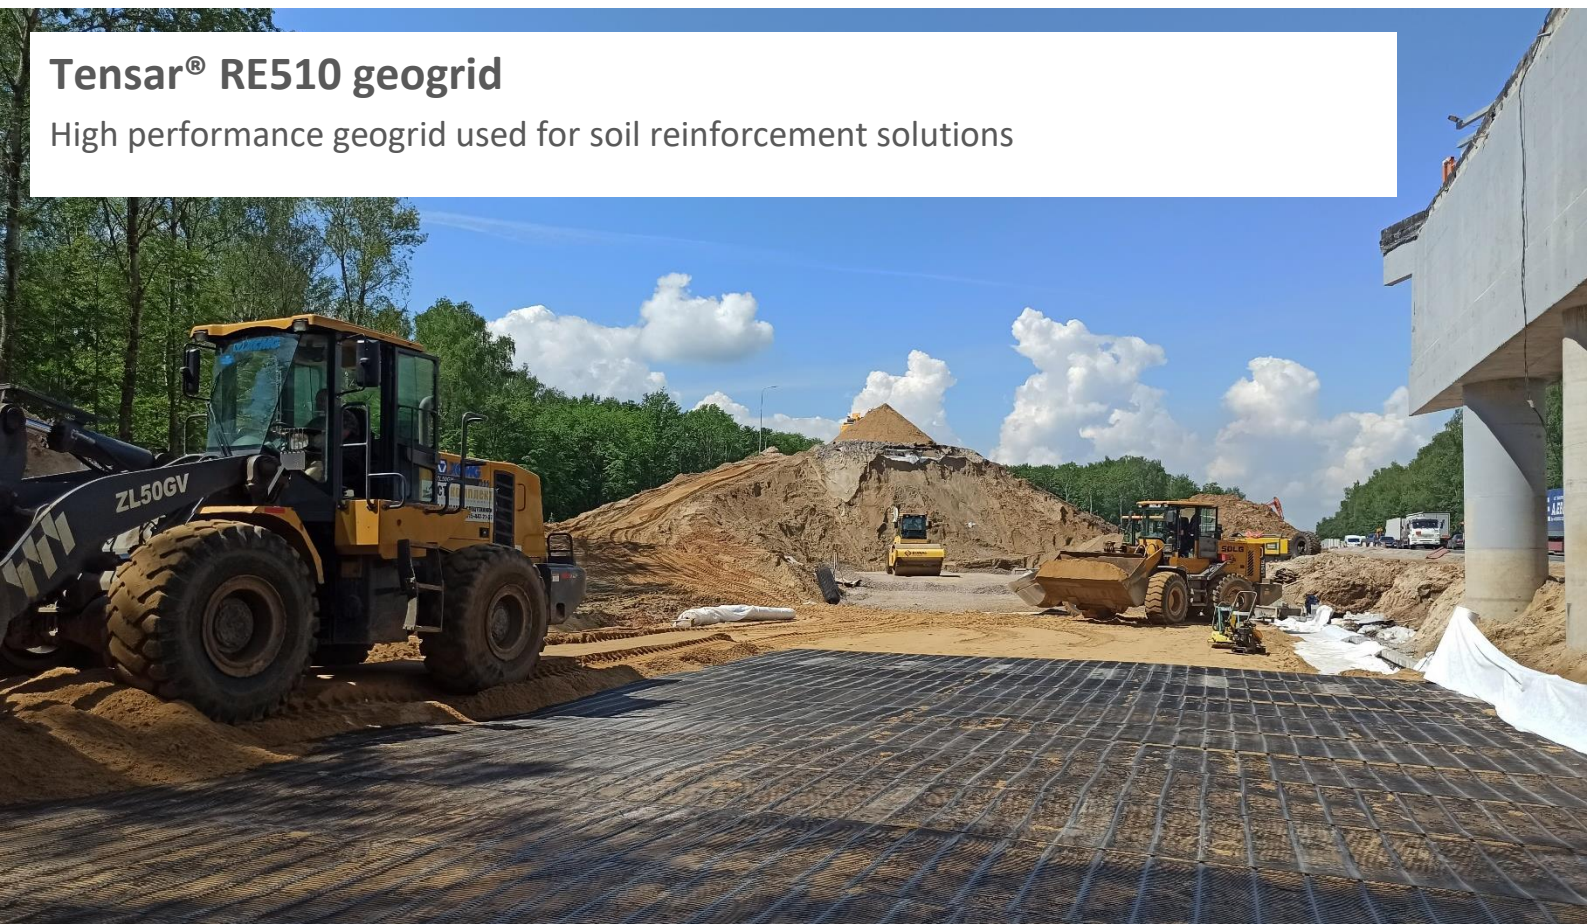

1. General information

Tensar International Limited

Programme operator

Kiwa-Ecobility Experts
 Voltastr. 5
 13355 Berlin
 Germany

Registration number

EPD-TENSAR-161-EN (Rev.1_20.05.2022)

This declaration is based on the Product Category Rules

PCR B – Geosynthetic products 2022-02-08 (draft)

Issue date

14.12.2021

Valid to

14.12.2026



Frank Huppertz
 (Head of Kiwa-Ecobility Experts)



Prof. Dr. Frank Heimbecher
 (Chairman of the independent expert committee – Kiwa-Ecobility Experts)

Tensar® RE510

Owner of the declaration

Tensar International Limited
 Units 2-4 Cunningham Court
 Shadsworth Business Park
 Blackburn, United Kingdom

Declared product / declared unit

1 m² geogrid

Scope

Tensar® RE510 geogrid is a product of the product series RE500. It is produced and distributed by Tensar International Limited, located in Blackburn (United Kingdom). The EPD refers to the specific product.

EPD type: Cradle to gate with options, and with modules C1-C4 and module D.

Kiwa-Ecobility Experts shall not be liable with respect to manufacturer information, life cycle assessment data and evidence.


Verification

The European standard EN15804:2012+A2:2019 serves as the core PCR.

Independent verification of the declaration and data according to ISO 14025:2006

internal

external



Anne Kees Jeeninga - Advieslab V.o.f.
 (Third party verifier)

2. Product

2.1 Product description

Tensar® RE500 products are uniaxial geogrids made from select grades of high-density polyethylene (HDPE) resins. The polymer structure is highly oriented to resist elongation (creep) under sustained tensile load. The products are resistant to installation damage and chemical and biological long-term degradation.

2.2 Application

Tensar® RE500 geogrids are used for the reinforcement of soils in the construction of structures such as retaining walls, bridge abutments, steep slopes, slip repairs, cellular foundation, or basal mattresses.

2.3 Technical data

Name	Value/Tolerance	Unit
Weight of product /TR 041 B.1/	290	g/m ²
Tensile Strength (EN ISO 10319)	MD – 46.2/-4.0	kN/m
Elongation at Maximum Load (EN ISO 12236)	MD – 11.0/ ±3.0	%
Static Puncture (CBR test) (EN ISO 12236)	NPD	kN/m
Dynamic Perforation Resistance (cone drop test) (EN ISO 13433)	NPD	mm
Tensile creep (EN ISO 13431) Long term creep rupture strength at a design life of 120 years and 10°C in soil temperature	20.7	kN/m
Damage during Installation (EN ISO 10722-1)	Retained Strength >90/-0	%
Dangerous substances (National Regulations in force in EU Member States)	Less than required by national regulations in EU Member States.	-
Specific dimension of the finished rolls (width x length)	1.3 x 75	m

2.4 Placing on the market/ Application rules

For quality assurance, the geogrids RE500 series are regulated in accordance with European harmonised standards and marked with a CE mark (or UKCA mark for the UK market) by the manufacturer. In the EU/EFTA (excluding Switzerland) the placing of geogrids on the market is covered by Regulation (EU) No. 305/2011 of 9 March 2011. For the product use the respective national provisions shall apply. The product is packed and transported as roll and mainly marketed in Europe.

2.5 Base materials / Ancillary materials

Tensar® RE500 geogrids are manufactured from high-density polyethylene (HDPE). HDPE is a thermoplastic polymer known for its high strength-to-density ratio. It belongs to the group of polyolefins and is partially crystalline and nonpolar. It is produced from the monomer ethylene. HDPE has little branching, giving it strong intermolecular forces and high tensile strength.

Raw material	Unit	Value
High-density polyethylene granules/pallets (HDPE)	%	100

There is no biogenic carbon in the products.

The product does not contain substances from the “Candidate list of substances of very high concern for authorisation” (SVHC).

2.6 Manufacturing

The manufacturing is located at Tensor Manufacturing Limited, 2 Sett End Road West, Blackburn, Lancashire, BB1 2PU, United Kingdom. The geogrids are made from HDPE granulate. In the first step granulate is melted and then extruded. After this, the extruded sheet passes the punching process. Depending on the specific product the punches differ in size. The punched sheet is then stretched. The result is the specific obround (uniaxial) structure of each geogrid. The products are rolled and then packaged.

The manufacturing process is shown in the following figure:

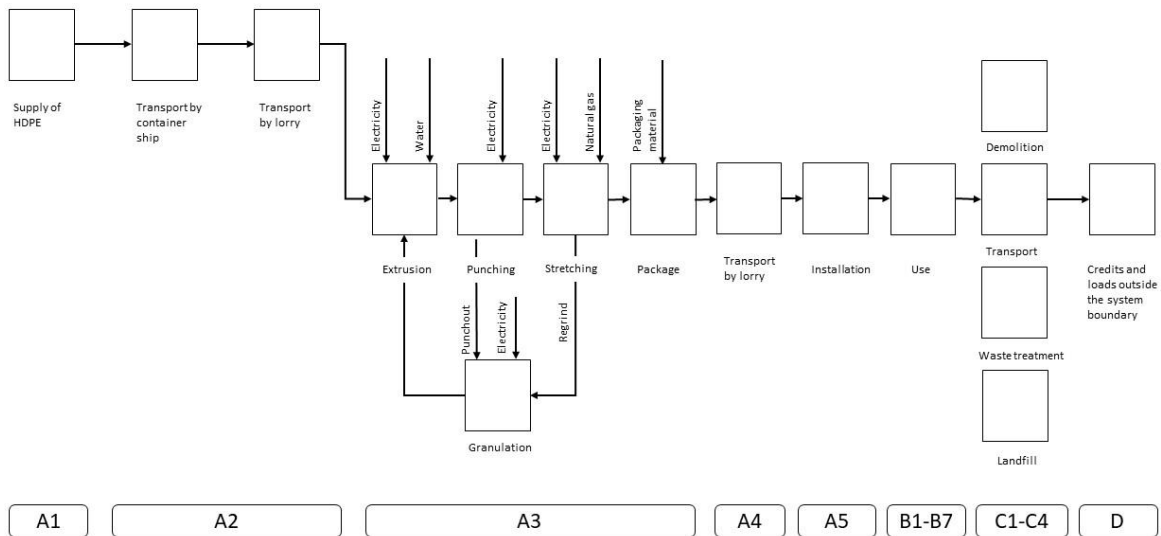


Figure 1: Process flow chart of the production of Tensor® RE500

2.7 Packaging

Geogrids are rolled and banded twice with PP banding tape.

2.8 Reference Service Life (RSL)

The RSL of the soil reinforcement geogrid depends on the service life of the reinforced retaining wall, slope or bridge abutment structure. The RE510 soil reinforcement geogrid is manufactured in accordance with a Quality Management System compliant with BS EN ISO 9001:2008. The reference service life of the product is up to 120 years. Further specification on the RSL of the product can be found in the table below.

Characteristic	Explanation
Durability Statement (EN 13251, Annex B)	To be covered within 1 month after installation. Predicted to be durable for up to 100 years in natural soils with $4 \leq \text{pH} \leq 9$ and soil temperatures $\leq 25^{\circ}\text{C}$ on the basis of the results of test method B.4.2 for 112 days.
Additional Note to Durability Statement (EN 13251, Annex B)	Whilst the durability statement made in the row above is the maximum allowed under the constraints of the relevant CE marking procedures as defined in the appropriate hEN standards and/or EAD, Tensar are confident that no deterioration in properties will occur for a period in excess of 120 years in appropriate soil conditions and would expect no loss of in-situ performance when stored outdoors for a period of 1 year prior to installation.

2.9 Other Information

For further information on RE500 products please visit the official Tensar International Limited webpage under the following link: www.tensar.co.uk

3. LCA: Calculation rules

3.1 Declared unit

In accordance with the PCR B 1 m² of geogrid is chosen as the declared unit.

Product	Unit	Value
Declared Unit	m ² geogrid	1
Unit weight	g/m ²	332
Conversion factor to 1 kg	-	3.01

3.2 System boundary

The Environmental Product Declaration is a complete life cycle with a functional unit. It considers all potential environmental impacts of the product from the cradle to the end of life.

The manufacturing phase includes the production or extraction of the source materials, the transport to the respective production plant and the production of the geotextiles. All inputs (raw materials, precursors, energy and auxiliary materials) as well as the by-products and waste are considered for all life cycle phases. Finally, only production-related energy consumption (excluding administration and social rooms) is considered.

The year 2020 represents the time reference for raw materials and electricity consumption. By defining the scenarios (transport from production site to Utrecht and the choice of end-of-life scenarios) according to specifications of the Dutch Environmental Database (NMD), the Netherlands is the relevant geographical reference of this EPD. Due to manufacturing in Blackburn (Module A1-A3), the exact geographical reference area is the United Kingdom, but can also be considered representative for the reference area Europe. Environmental effects such as the greenhouse effect can occur with a strong spatial and temporal offset.

The following production steps are considered during the manufacturing phase:

- Extraction and processing of the raw materials (HDPE pre-compounded with UV and anti-oxidant stabiliser packages)
- Transport to the production site
- Processing of the geogrids (extrusion, punching, stretching)
- Packaging (including packaging material)
- End-of-life (including transport)

Secondary fuels are not included in the production process and are therefore not considered. The waste materials and quantities produced are included in the respective modules.

3.3 Estimates and assumptions

Almost all datasets chosen for the LCA refer to the EU as the geographic reference. Transport distances for all raw materials used (raw materials, operating materials, packaging) could be recorded. A payload factor of 50% was used for all truck transports (suppliers, disposal transports and internal transports), which corresponds to a full delivery and empty return trip. A data set for a non-specific truck was used.

Tensar International Limited switched in 2020 to a 100% renewable wind energy. According to a wind electricity portal, windbranche.de, 50% of wind power in UK is generated from onshore and 50% from offshore wind parks. Based on this assumption an electricity data set was generated for the LCA calculation. No CO₂ certificates were considered.

3.4 Cut-off criteria

All flows which influence is higher than 1% on the total mass, energy or environmental impact are included in the LCA. It can be assumed that the neglected processes would have contributed less than 5% to the impact categories considered.

All process specific data could be determined and modelled by the use of generic data (EcoInvent 3.6) The HDPE is bulk delivered in 24 tons batches – the pellets are blown into the silo. Therefore, there is no packaging waste for the HDPE.

3.5 Period under review

The production data have been collected for the operating year 2020.

3.6 Data quality

For all processes primary data was collected and provided by Tensar International Limited. The primary data refers to year 2020. For the data, which is not influenced by the manufacturer, generic data was used. The secondary data was taken from the database EcoInvent (version 3.6). The database is maintained on a regular basis and thus meets the requirements of EN 15804 (background data not older than 10 years). The power sources were chosen from data for the UK in 2020, in accordance with the geographical and time representativeness. The data quality is very good, because all process specific data could be documented and modelled by using the generic data.

RETHiNK EPD web application from the company NIBE was used to model the life cycle for the production and disposal of the declared product systems. To ensure that the results are comparable, consistent background data from the international database EcoInvent was used in the LCA (e.g. data records on energy, transport, auxiliary materials, and supplies). Almost all consistent data sets contained in the EcoInvent database are documented and can be viewed online.

3.7 Allocation

Allocations were avoided as far as possible. Tensar uses HDPE for several products as a raw material and all PP residues, which occur during the manufacturing, are recycled. The residues are not mandatorily used again for the product from which they originate. The recycled residues might be used for products from another series.

For example: 5% residues of HDPE occur during the manufacturing of geogrid A. These 5% are recycled, but due to operating conditions, it is possible that 4% is reused for geogrid A and 1% for geogrid B.

For this calculation it was assumed, that the generated punchout and the regrind material of a specific geogrid is reused in a closed loop recycling for the analysed geogrid. This was done to avoid product specific shifts of potential environmental impacts. It was also assumed that the recycled HDPE substitutes virgin HDPE after a regranulation and that this does not imply any quality losses.

3.8 Comparability

In principle, a comparison or assessment of the environmental impacts of different products is only possible if they have been prepared in accordance with EN 15804. For the evaluation of the



comparability, the following aspects have to be considered in particular: PCR used, functional or declared unit, geographical reference, definition of the system boundary, declared modules, data selection (primary or secondary data, background database, data quality), scenarios used for use and disposal phases, and the life cycle inventory (data collection, calculation methods, allocations, validity period). PCRs and general program instructions of different EPDs programs may differ. A comparability needs to be evaluated. For further guidance see EN 15804+A2 (5.3 Comparability of EPD for construction products) and ISO 14025 (6.7.2 Requirements for comparability).

4. LCA: Scenarios and additional technical information

The distance to the construction site (A4) was calculated according to the NMD (Nationale Milieu Database (Dutch National Environmental Database)) method. Accordingly, the distance between the production site in Blackburn and Utrecht was considered (900 km). As the mean of transportation truck (unspecified) was chosen.

It is assumed that no activities for maintenance, repair, transport and replacement, refurbishment or other material and energy flows take place during the RSL. Modules B1 to B3 are therefore assumed to be zero. Product replacement (B4) and renovation (B5) only apply when the product is considered in a lifespan (of a building, work, etc.). Operational water and energy use are not considered.

When installing the soil reinforcement geogrid, it is simply unrolled by hand on prepared layer of reinforced fill (granular/cohesive material) to the required reinforcement length, and then cut, often by use of hand tools. Apart from rolling out, no further installation measures are necessary, which would otherwise be required. RE layers are also installed manually vertically in Tensar Stratum (reinforcement layers) applications. A reject or unused portion of 2-3% of the soil reinforcement geogrid is assumed during the installation process (Module A5).

For C1 the process and amount of the generic dataset 'Polyester weefsel' (EN: polyester fabric) out of chapter 22.46 Grondwapening en grondscheiding (EN: 22.46 Soil reinforcement and soil separation) of the program DuboCalc with database version NMD version 1.8 - 5.01.14052018. In this generic dataset 0.0013 hrs of the process Gr.mach.hydr. (gemiddeld) (EN: Hydraulic excavator (average)) are stated for module C1 (demolition).

For the end-of-life the NMD scenario PE/PP soil reinforcement (geotextile and geogrid) was chosen. This scenario assumes that 25% of the geogrid remains in the subground, 70% are incinerated and 5% are recycled.

Note: The transport distances of the waste are based on the standard waste scenarios of the NMD Determination Method (SBK 2019): incineration 150 km/ recycling 50 km / landfill 100 km; vehicle: truck, unspecified. For energy recovery, it is assumed that only fossil raw materials are substituted, considering the calorific values of the raw materials of the declared product and energy and thermal efficiencies of 18% and 32%. According the EN 15804, loads are credited in A3 or C3 to C4 and benefits are credited in module D.

For all transports, the environmental profile of a non-specific truck transport was used (conservative assumption): The vehicle operates with diesel, and it provides a fleet average that includes different lorry classes as well as EURO classes. This environmental profile contains data for transport, which is calculated for an average load factor, including empty return trips (EcoInvent 3.6).

5. LCA: Results

The following tables show the results of the impact assessment indicators, resource use, waste and other output streams. The results presented here refer to the declared specific product.

Disclaimer on ADP-e, ADP-f, WDP, ETP-fw, HTP-c, HTP-nc, SQP: The results of these environmental impact indicators must be used with caution, as the uncertainties in these results are high or as there is limited experience with the indicator.

Disclaimer on IR: This impact category mainly addresses the potential effect of low dose ionizing radiation on human health in the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents and occupational exposures, nor does it consider radioactive waste disposal in underground facilities. Potential ionizing radiation from soil, radon, and some building materials is also not measured by this indicator.

Description of the system boundary

Product stage			Construction process stage		Use stage							End of life stage				Benefits and loads beyond the system boundaries
Raw material supply	Transport	Manu-facturing	Transport from manu-facturer to place of use	Construction -installation process	Use	Main-tenance	Repair	Replacement	Refur-bishmen	Operational energy use	Operational water use	De-struction / demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	X	X	X	MND	MND	MND	MND	X	X	X	X	X

X=Module declared | MND=Module not declared

Results of the LCA – Environmental impact: 1 m² Tensar® RE510 (EN 15804+A2)

Parameter	Unit	A1	A2	A3	A4	A5	B1	B2	B3	C1	C2	C3	C4	D	
Core environmental impact indicators															
ADP-mm	kg Sb-equiv.	5,95E-06	1,23E-06	1,08E-06	1,02E-06	3,07E-07	0,00E+00	0,00E+00	0,00E+00	1,04E-07	1,22E-07	8,00E-07	9,42E-09	-4,06E-07	
ADP-f	MJ	2,35E+01	3,89E-01	6,00E+00	6,08E-01	9,35E-01	0,00E+00	0,00E+00	0,00E+00	9,37E-01	7,26E-02	4,86E-01	2,08E-02	-7,49E+00	
AP	mol H ⁺ eqv.	2,39E-03	1,29E-04	5,35E-04	2,34E-04	1,08E-04	0,00E+00	0,00E+00	0,00E+00	7,12E-04	2,79E-05	2,81E-04	7,68E-06	-4,30E-04	
EP-fw	kg PO ₄ eqv.	1,13E-05	2,85E-07	7,51E-06	4,07E-07	6,44E-07	0,00E+00	0,00E+00	0,00E+00	2,48E-07	4,86E-08	1,88E-06	1,58E-08	-9,86E-07	
EP-m	kg N eqv.	4,09E-04	2,56E-05	1,22E-04	8,24E-05	2,20E-05	0,00E+00	0,00E+00	0,00E+00	3,14E-04	9,84E-06	7,68E-05	4,65E-06	-1,13E-04	
EP-t	mol N eqv.	4,56E-03	2,87E-04	1,33E-03	9,09E-04	2,43E-04	0,00E+00	0,00E+00	0,00E+00	3,45E-03	1,09E-04	8,56E-04	2,82E-05	-1,25E-03	
GWP-b	kg CO ₂ eqv.	3,47E-03	1,03E-05	2,12E-04	1,86E-05	1,14E-04	0,00E+00	0,00E+00	0,00E+00	1,89E-05	2,22E-06	9,02E-05	9,48E-06	-2,77E-04	
GWP-f	kg CO ₂ eqv.	6,65E-01	2,65E-02	3,80E-01	4,03E-02	5,28E-02	0,00E+00	0,00E+00	0,00E+00	6,81E-02	4,82E-03	6,23E-01	1,23E-02	-4,10E-01	
GWP-luluc	kg CO ₂ eqv.	2,04E-04	1,54E-05	4,13E-05	1,48E-05	9,86E-06	0,00E+00	0,00E+00	0,00E+00	5,37E-06	1,76E-06	5,07E-05	4,35E-07	-2,12E-05	
GWP-total	kg CO ₂ eqv.	6,69E-01	2,65E-02	3,80E-01	4,04E-02	5,29E-02	0,00E+00	0,00E+00	0,00E+00	6,81E-02	4,82E-03	6,24E-01	1,23E-02	-4,10E-01	
ODP	kg CFC 11 eqv.	1,69E-08	5,65E-09	4,98E-08	8,90E-09	3,07E-09	0,00E+00	0,00E+00	0,00E+00	1,47E-08	1,06E-09	1,91E-08	2,72E-10	-4,97E-08	
POCP	kg NMVOC eqv.	2,22E-03	9,32E-05	4,67E-04	2,59E-04	9,96E-05	0,00E+00	0,00E+00	0,00E+00	9,49E-04	3,10E-05	2,30E-04	1,08E-05	-4,49E-04	
WDP	m ³ world eqv.	5,34E-01	1,34E-03	3,46E-01	2,18E-03	2,75E-02	0,00E+00	0,00E+00	0,00E+00	1,26E-03	2,60E-04	3,18E-02	8,92E-04	-5,48E-02	
Additional environmental impact indicators															
ETP-fw	CTUe	3,72E+00	3,49E-01	1,60E+00	5,42E-01	4,28E-01	0,00E+00	0,00E+00	0,00E+00	5,65E-01	6,48E-02	7,84E+00	2,22E-02	-5,55E-01	
HTP-c	CTUh	1,75E-10	1,28E-11	2,08E-10	1,76E-11	1,62E-11	0,00E+00	0,00E+00	0,00E+00	1,97E-11	2,10E-12	1,19E-10	5,81E-13	-3,27E-11	
HTP-nc	CTUh	4,07E-09	3,45E-10	2,46E-09	5,93E-10	3,02E-10	0,00E+00	0,00E+00	0,00E+00	4,85E-10	7,09E-11	2,48E-09	1,44E-11	-5,45E-10	
IRP	kBq U235 eqv.	1,57E-02	1,70E-03	3,82E-03	2,55E-03	7,85E-04	0,00E+00	0,00E+00	0,00E+00	4,02E-03	3,04E-04	1,99E-03	8,15E-05	-2,83E-03	
PM	disease incidence	1,98E-08	1,22E-09	3,86E-09	3,63E-09	9,42E-10	0,00E+00	0,00E+00	0,00E+00	1,89E-08	4,33E-10	2,28E-09	1,45E-10	-1,89E-09	
SQP	-	7,68E-01	1,83E-01	4,82E-01	5,28E-01	6,77E-02	0,00E+00	0,00E+00	0,00E+00	1,20E-01	6,30E-02	1,79E-01	4,92E-02	-1,30E-01	

ADP-mm= Abiotic depletion potential for non-fossil resources | ADP-f=Abiotic depletion for fossil resources potential | AP= Acidification potential, Accumulated Exceedance | EP-fw = Eutrophication potential, fraction of nutrients reaching freshwater end compartment | EP-m= Eutrophication potential, fraction of nutrients reaching marine end compartment | EP-T= Eutrophication potential, Accumulated Exceedance | GWP-b=Global Warming Potential biogenic | GWP-f=Global Warming Potential fossil fuels | GWP-luluc=Global Warming Potential land use and land use change | GWP-total=Global Warming Potential total | ODP=Depletion potential of the stratospheric ozone layer | POCP=Formation potential of tropospheric ozone | WDP=Water (user) deprivation potential, deprivation- weighted water consumption | ETP-fw=Potential Comparative Toxic Unit for ecosystems | HTP-c=Potential Toxic Unit for Humans toxicity, cancer | HTP-nc= Potential Toxic Unit for humans, non-cancer | IRP=Potential Human exposure efficiency relative to U235, human health | PM=Potential incidence of disease due to Particulate Matter emissions | SQP=Potential soil quality index

Results of the LCA – Resource and environmental information: 1 m² Tensar® RE510 (EN 15804+A2)

Parameter	Unit	A1	A2	A3	A4	A5	B1	B2	B3	C1	C2	C3	C4	D
PERE	MJ	3,94E-01	7,99E-03	9,50E+00	7,61E-03	2,99E-01	0,00E+00	0,00E+00	0,00E+00	5,07E-03	9,09E-04	4,92E-02	3,69E-04	-3,36E-02
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	3,94E-01	7,99E-03	9,50E+00	7,61E-03	2,99E-01	0,00E+00	0,00E+00	0,00E+00	5,07E-03	9,09E-04	4,92E-02	3,69E-04	-3,36E-02
PENRE	MJ	1,27E+01	4,13E-01	6,50E+00	6,46E-01	6,30E-01	0,00E+00	0,00E+00	0,00E+00	9,95E-01	7,71E-02	5,16E-01	2,21E-02	-7,62E+00
PENRM	MJ	1,25E+01	0,00E+00	1,19E-01	0,00E+00	3,79E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-6,44E-01
PENRT	MJ	2,52E+01	4,13E-01	6,62E+00	6,46E-01	1,01E+00	0,00E+00	0,00E+00	0,00E+00	9,95E-01	7,71E-02	5,16E-01	2,21E-02	-8,26E+00
SM	Kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	M3	8,05E-03	5,31E-05	8,16E-03	7,41E-05	5,20E-04	0,00E+00	0,00E+00	0,00E+00	4,83E-05	8,85E-06	9,35E-04	2,17E-05	-7,77E-04
HWD	Kg	2,85E-06	1,03E-06	9,88E-06	1,54E-06	4,96E-07	0,00E+00	0,00E+00	0,00E+00	2,55E-06	1,84E-07	9,26E-07	3,17E-08	-8,09E-06
NHWD	Kg	2,11E-02	1,11E-02	3,57E-02	3,86E-02	6,20E-03	0,00E+00	0,00E+00	0,00E+00	1,11E-03	4,61E-03	1,20E-02	8,32E-02	-3,61E-03
RWD	Kg	1,40E-05	2,59E-06	4,89E-06	3,99E-06	8,36E-07	0,00E+00	0,00E+00	0,00E+00	6,51E-06	4,77E-07	1,75E-06	1,24E-07	-3,72E-06
CRU	Kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	Kg	0,00E+00	0,00E+00	1,66E-04	0,00E+00	5,04E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,66E-02	0,00E+00	0,00E+00
MER	Kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EE	MJ	0,00E+00	0,00E+00	4,28E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,41E+00

PERE=Use of renewable primary energy excluding renewable primary energy resources used as raw materials | PERM= Use of renewable primary energy resources used as raw materials | PERT=Total use of renewable primary energy resources | PENRE= Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials | PENRM= Use of non-renewable primary energy resources used as raw materials | PENRT= Total use of non-renewable primary energy resources | SM=Use of secondary material | RSF=Use of renewable secondary fuels | NRSF=Use of non-renewable secondary fuels | FW=Use of fresh water | HWD=Hazardous waste disposed | NHWD=Non-hazardous waste disposed | RWD=Radioactive waste disposed | CRU=Components for re-use | MFR=Materials for recycling | MER=Materials for energy recovery | EE=Exported energy

Results of the LCA – Environmental impact, optional : 1 m² Tensar® RE510 (Set 1 of the NMD determination method (version 1.0; July 2020))

Parameter	Unit	A1	A2	A3	A4	A5	B1	B2	B3	C1	C2	C3	C4	D
ADP-e	Kg Sb	5,95E-06	1,23E-06	1,08E-06	1,02E-06	3,07E-07	0,00E+00	0,00E+00	0,00E+00	1,04E-07	1,22E-07	8,00E-07	9,42E-09	-4,06E-07
ADP-f	Kg Sb	1,12E-02	1,85E-04	3,22E-03	2,94E-04	4,57E-04	0,00E+00	0,00E+00	0,00E+00	4,45E-04	3,51E-05	2,59E-04	1,01E-05	-3,97E-03
GWP	Kg CO ₂ eqv.	6,39E-01	2,63E-02	3,75E-01	4,00E-02	5,18E-02	0,00E+00	0,00E+00	0,00E+00	6,74E-02	4,78E-03	6,23E-01	1,05E-02	-4,04E-01
ODP	Kg CFC-11 eqv.	1,77E-08	4,53E-09	4,40E-08	7,10E-09	2,83E-09	0,00E+00	0,00E+00	0,00E+00	1,17E-08	8,47E-10	1,91E-08	2,18E-10	-4,39E-08
POCP	Kg Ethene eqv.	6,09E-04	1,43E-05	8,66E-05	2,41E-05	2,29E-05	0,00E+00	0,00E+00	0,00E+00	6,86E-05	2,88E-06	2,22E-05	2,39E-06	-8,37E-05
AP	Kg SO ₂ eqv.	1,99E-03	1,05E-04	4,32E-04	1,76E-04	8,87E-05	0,00E+00	0,00E+00	0,00E+00	5,08E-04	2,10E-05	2,19E-04	5,83E-06	-3,41E-04
EP	Kg PO ₄ ³⁻ eqv.	1,86E-04	1,33E-05	6,90E-05	3,45E-05	1,04E-05	0,00E+00	0,00E+00	0,00E+00	1,15E-04	4,13E-06	3,57E-05	2,35E-06	-4,41E-05
HTP	kg 1.4 DB	1,04E-01	9,66E-03	1,27E-01	1,68E-02	9,20E-03	0,00E+00	0,00E+00	0,00E+00	2,50E-02	2,01E-03	4,54E-02	8,62E-04	-2,45E-02
FAETP	kg 1.4 DB	1,96E-03	2,49E-04	8,94E-04	4,92E-04	2,07E-04	0,00E+00	0,00E+00	0,00E+00	3,47E-04	5,87E-05	2,33E-03	8,97E-04	-2,94E-04
MAETP	kg 1.4 DB	6,28E+00	9,32E-01	2,52E+00	1,77E+00	5,84E-01	0,00E+00	0,00E+00	0,00E+00	1,21E+00	2,11E-01	6,79E+00	8,96E-01	-1,19E+00
TETP	kg 1.4 DB	4,12E-04	4,15E-05	4,22E-04	5,95E-05	3,19E-05	0,00E+00	0,00E+00	0,00E+00	4,11E-05	7,11E-06	1,16E-04	1,49E-06	-8,13E-05

ADP-e= Abiotic depletion potential for elements | ADP-f= Abiotic depletion for fossil resources potential | GWP=Global Warming Potential | ODP=Depletion potential of the stratospheric ozone layer | POCP= Formation potential of tropospheric ozone | AP= Acidification potential, Accumulated Exceedance | EP= Eutrophication potential, Accumulated Exceedance | HTP= human-toxicological effects | FAETP= ecotoxicological effects, aquatic (freshwater) | MAETP= ecotoxicological effects, aquatic (marine water) | TETP= ecotoxicological effects, terrestrial

6. LCA: Interpretation

As shown in the figure below, raw material supply (A1) dominates in most environmental core indicators, often followed by the production process (A3). In some environmental core indicators demolition phase (C1) has a great impact. However, C1 is strongly dependent on the assumption (here diesel consumption of a construction site vehicle). The highest influence on the Global Warming Potential have row material supply (A1), waste processing (C3), and production process (A3). Transports (A2, A4, C2) have rather a minor impact within all core indicators.

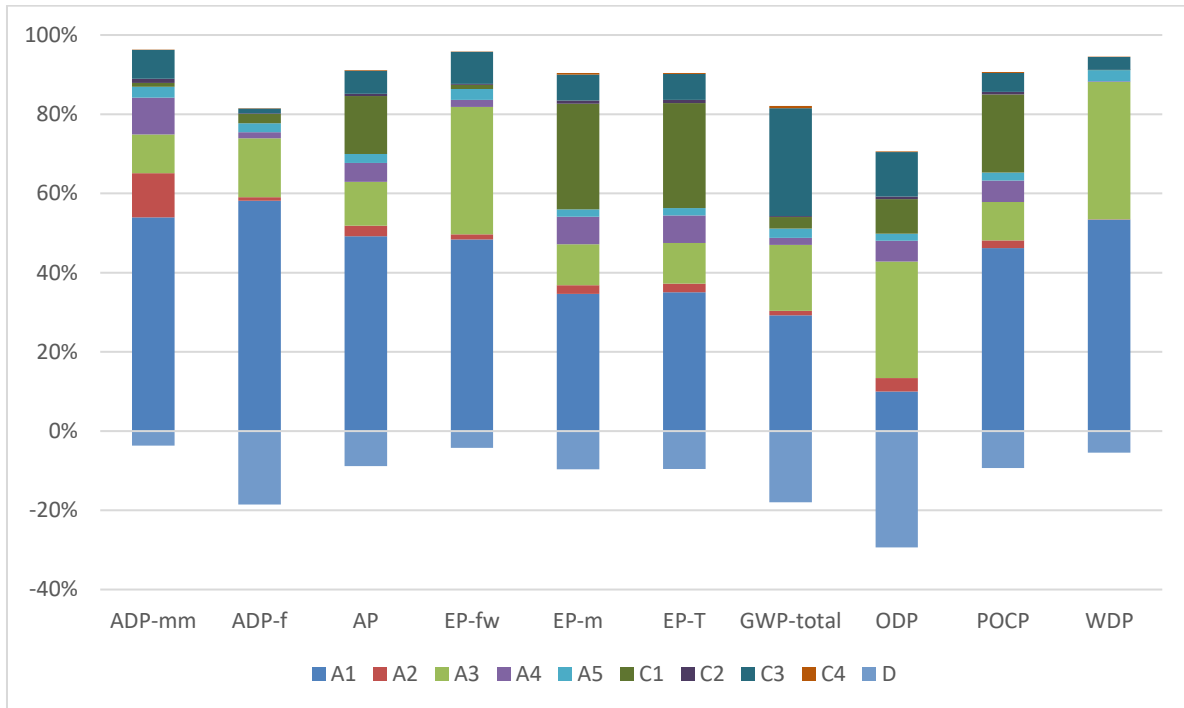


Figure: Tensor[®] RE510 - Impact of the individual modules on the environmental core indicators

The MKI (Dutch: Milieukostenindicator) value calculated based on set 1 of the NMD determination method amounts to 0.122.

The data quality can be classified as good overall. All relevant process-specific data could be collected in the operational data collection. Consistent data sets from the EcoInvent database were available for almost all inputs and outputs. The background data meet the requirements of EN 15804, and the production data were recorded for the 2020 operating year. The quantities of raw materials and supplies used as well as energy consumption were recorded for the entire operating year.



7. Requisite evidence

In 2020, RE570 was tested concerning its leaching behavior using the trough method. Due to this method the institute "Prüftechnik Z+L" could determine the direct environmental impacts to the local environment (soil and groundwater). In accordance with the criteria of the German Federal Soil Protection and Contaminated Sites Ordinance (Bundesbodenschutz- und Altlastenverordnung) the environmental soundness of the geogrid could be confirmed. This result can be transferred to all the other types of geogrids referring to the product series RE500, and therefore to the RE510.

8. References

CML-IA April 2013 – Charakterisierungsfaktoren entwickelt durch Institut of Environmental Sciences (CML): Universität Leiden, Niederlande - <http://www.cml.leiden.edu/software/data-cmlia.html>

Donndorf, R., Kahle H., Müller, G., Philipp H-J., Taschow, H-J., Wolf, O. (1973): Werkstoffeinsatz und Korrosionsschutz in der chemischen Industrie. VEB Deutscher Verlag für Grundstoffindustrie Leipzig.

European Commission Joint Research Centre Institute for Prospective Technological Studies (JCR 2014): End-of-waste criteria for waste plastic for conversion, Seville, 2014, doi:10.2791/13033

Klöpffer, W., Grahl B.: Ökobilanz (LCA) – Ein Leitfaden für die Ausbildung und Beruf, Wily-VCH Verlag, Weinheim, 2007

Rosauer, V. (2010): Abschätzung der herstellungsbedingten Qualität und Lebensdauer von Asphalt-deckschichten mit Hilfe der Risikoanalyse (Estimation of the production-related quality and service life of asphalt wearing courses with the aid of risk analysis). Technischen Universität Darmstadt, 2010

Stichting Bouwkwaliiteit (SBK) – Foundation for Building Quality; “Determination Method: Environmental Performance of Buildings and Civil Engineering Works”

NMD determination method: Stichting Nationale Milieudatabase; Bepalingsmethode Milieuprestatie Bouwwerken; Version 1.0; July 2020; Berekeningswijze voor het bepalen van de milieuprestatie van bouwwerken gedurende hun gehele levensduur, gebaseerd op de EN 15804.

Windbranche.de – Das Branchenportal rund um die Windenergie. Wind power and electricity generation in Great Britain: <https://www.windbranche.de/wind/windstrom/windenergie-grossbritannien>, last accessed 19 July 2021.

Standards and laws

ISO 14040:2006, Environmental management - Life cycle assessment - Principles and framework

ISO 14044:2006, Environmental management - Life cycle assessment - Requirements and guidelines

ISO 14025:2006: Environmental labels and declarations — Type III environmental declarations — Principles and procedures EN 13249

EN 15804:2012+A2:2019 Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

PCR A: General Program Category Rules for Construction Products from the EPD program Kiwa-Ecobility Experts, R.O_2021-07-16

PCR B: Product Category Rules (PCR) from the Kiwa-Ecobility Experts EPD program: “Geosynthetic products”, edition 2022-02-08 (draft)

	<p>Publisher Kiwa-Ecobility Experts Voltastr. 5 13355 Berlin Germany</p>	<p>Mail Web</p>	<p>DE.Ecobility.Experts@kiwa.com https://www.kiwa.com/de/de/themes/ecobility-experts/ecobility-experts/</p>
	<p>Programme operator Kiwa-Ecobility Experts Voltastr. 5 13355 Berlin Germany</p>	<p>Mail Web</p>	<p>DE.Ecobility.Experts@kiwa.com https://www.kiwa.com/de/de/themes/ecobility-experts/ecobility-experts/</p>
	<p>Author of the Life Cycle Assessment Kiwa GmbH Voltastr.5 13355 Berlin Germany</p>	<p>Tel. Fax. Mail Web</p>	<p>+49 (0) 30 467761-43 +49 (0) 30 467761-10 DE.Nachhaltigkeit@kiwa.com https://www.kiwa.com/</p>
	<p>Owner of the declaration Tensar International Limited Units 2-4 Cunningham Court Shadsworth Business Park Blackburn, United Kingdom</p>	<p>Tel. Fax. Mail Web</p>	<p>+44 (0) 1254 262 431 +44 (0) 1254 266 867 info@tensar-international.com www.tensar.co.uk</p>